



FW centric devices,
NIC customization

Firmware Centric Device

Configurable Firmware

- Modern devices are complex
 - More functionality <> More HW units and engines
 - More Processing power <> More capabilities
 - More NVM capacity <> More Configuration options !
- Modern Device <> FW centric device
- Some Modern Devices have ARM cores and can run entire Linux OS.
- Even some early NICs had MIPS cores running Linux OS

Customization Nightmare

Configurable Firmware


Multitude of features

- Multi port
 - Multi function
 - E-switch
 - Virtualization
 - Traffic shaping and rate limiting
 - Multi protocol/stack (ethernet, rdma, vdpa, virtio, nvme, etc ..)
 - Standard offloads (Checksum, GRO, TSO, etc ..)
 - Modes of operation: eBPF, XDP, XSK, HDS, RDMA.
 - Crypto offloads engines (TLS, IPSec, MACsec)
 - TC offloads, tunneling and full pipeline offloads.
 - Vendor specific optimizations
-
- These features simply don't work in harmony magically out of the box.
 - User specific demands per feature

ConnecTX (4 and later)

Some Stats

- 500K Lines of “core” code.
- ~600 NV config parameters
- Forward compatible devices
 - FW/driver backward compatible

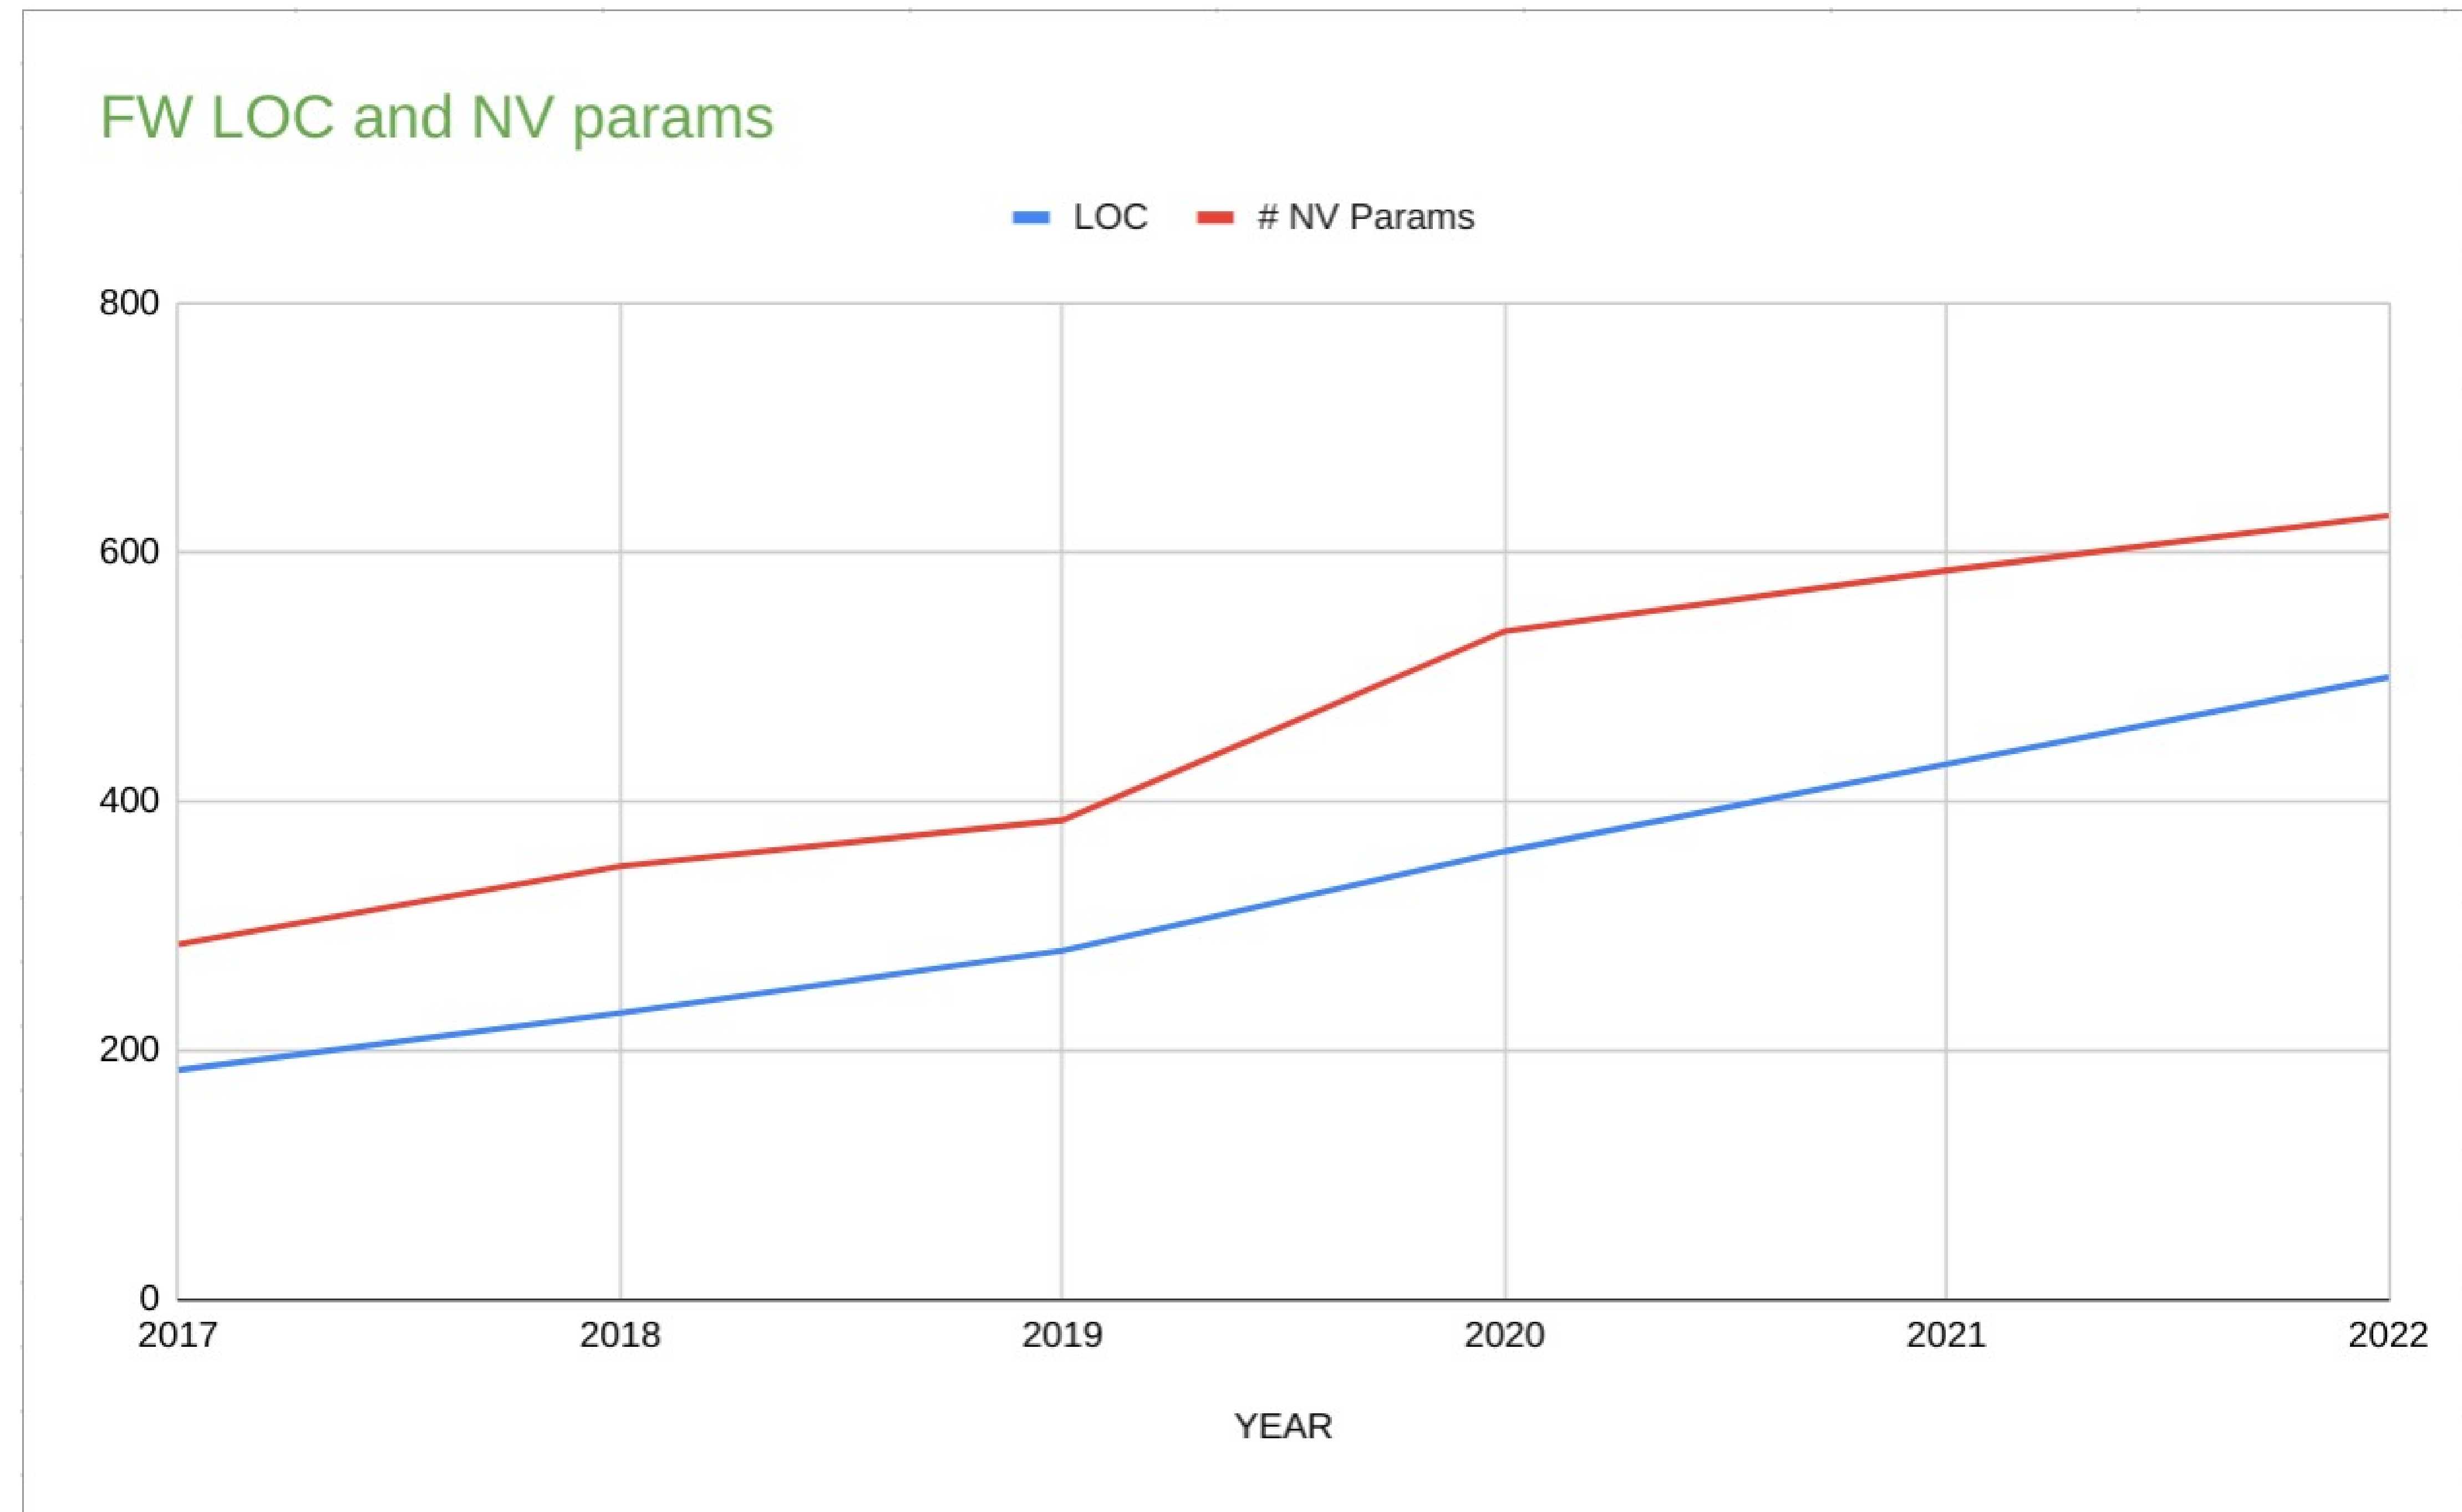

Highly configurable

Yet Not Flexible

- Sadly, although highly configurable, these devices aren't as flexible.
- Human intervention is required, and recommended :).
- Exact combination of features to boot with
- Most efficient configuration
- Vendor specific optimizations and parameters.
 - ConnectX device has ~600 NV Firmware parameters
 - ~25% growth year over year.
- standardization can only go so far.

Vendor Specific Toolbox :'(

I don't like them too!

- To address some of the issues vendors had to extend their basic Firmware and NVM tools
- Require direct user space access to PCI
- Require proprietary kernel modules and long list of toolchain
- Not welcome in production
- Long turnaround cycles
- Secure boot and secure kernel, no solution !

Real life stories :

- How do I increase your HW GRO timeout ?
- Booting to other OS to make configuration changes
- Personal Laptop i2c on production machines
- Forgetting a debug fw running in production
- down time due to bad custom fw, just to enable a simple flag !

Types of dials and knobs

- Functionality <> enable/disable/select.
- Performance <> parameters values, and rangers.
- Verbosity/Debugability (RAS feature) <> tirgger, monitor, capture, report

Categorization:

- 1) non-volatile device configuration and firmware update - static and preserved across reboots
- 2) Volatile device global firmware configuration – runtime.
- 3) Volatile per-function firmware configuration (PF/VF/SF) – runtime.
- 4) RAS features for FW - capture crash/fault data, read back logs, trigger device diagnostic modes, report device diagnostic data, device attestation

upstream APIs

Mainstream utilities (Devlink)

<https://man7.org/linux/man-pages/man8/devlink-dev.8.html>

- devlink goal was always to provide a healthy mix of standards based multi-vendor APIs side by side
- Devlink [vendor specific] params
- Devlink health
- Devlink resource
- Devlink port functions *

(1 & 2) Non-Volatile and Volatile NIC customization

Devlink parameters

<https://www.kernel.org/doc/html/latest/networking/devlink/devlink-params.html>


- SET:
 - `devlink dev param set DEV name PARAMETER value VALUE cmode { runtime | driverinit | permanent }`
- READ:
 - `devlink dev param show`
- Reload driver:
 - `devlink dev reload pci/0000:01:00.0`
- Vendor Specific params are marked
 - driver-specific
- Problems:
 - very hard to agree what's driver-specific what's generic
 - Almost everything starts as driver-specific
 - Only a small subset of NIC FW customization exist today in devlink !

```
bash-4.4# devlink dev param show
pci/0000:82:00.0:
  name internal_error_reset type generic
  values:
    cmode runtime value true
    cmode driverinit value true
  name max_macs type generic
  values:
    cmode driverinit value 128
  name region_snapshot_enable type generic
  values:
    cmode runtime value false
    cmode driverinit value false
  name enable_64b_cqe_eqe type driver-specific
  values:
    cmode driverinit value true
  name enable_4k_uar type driver-specific
  values:
    cmode driverinit value false
```

(3) Volatile Per function configuration (PF/VF/SF)

Devlink port functions Virtualization mess

- Virtualization environments where physical, virtual and synthetic functions are spawned on demand
- VFs are created via sriov sub-system
- SFs are managed by eswitch
- These functions, are represented via function ports (port flavor) in devlink
- VF/SF customization required and life cycle management
- High scale HW resource limitations
- Missing devlink params infrastructure per function port

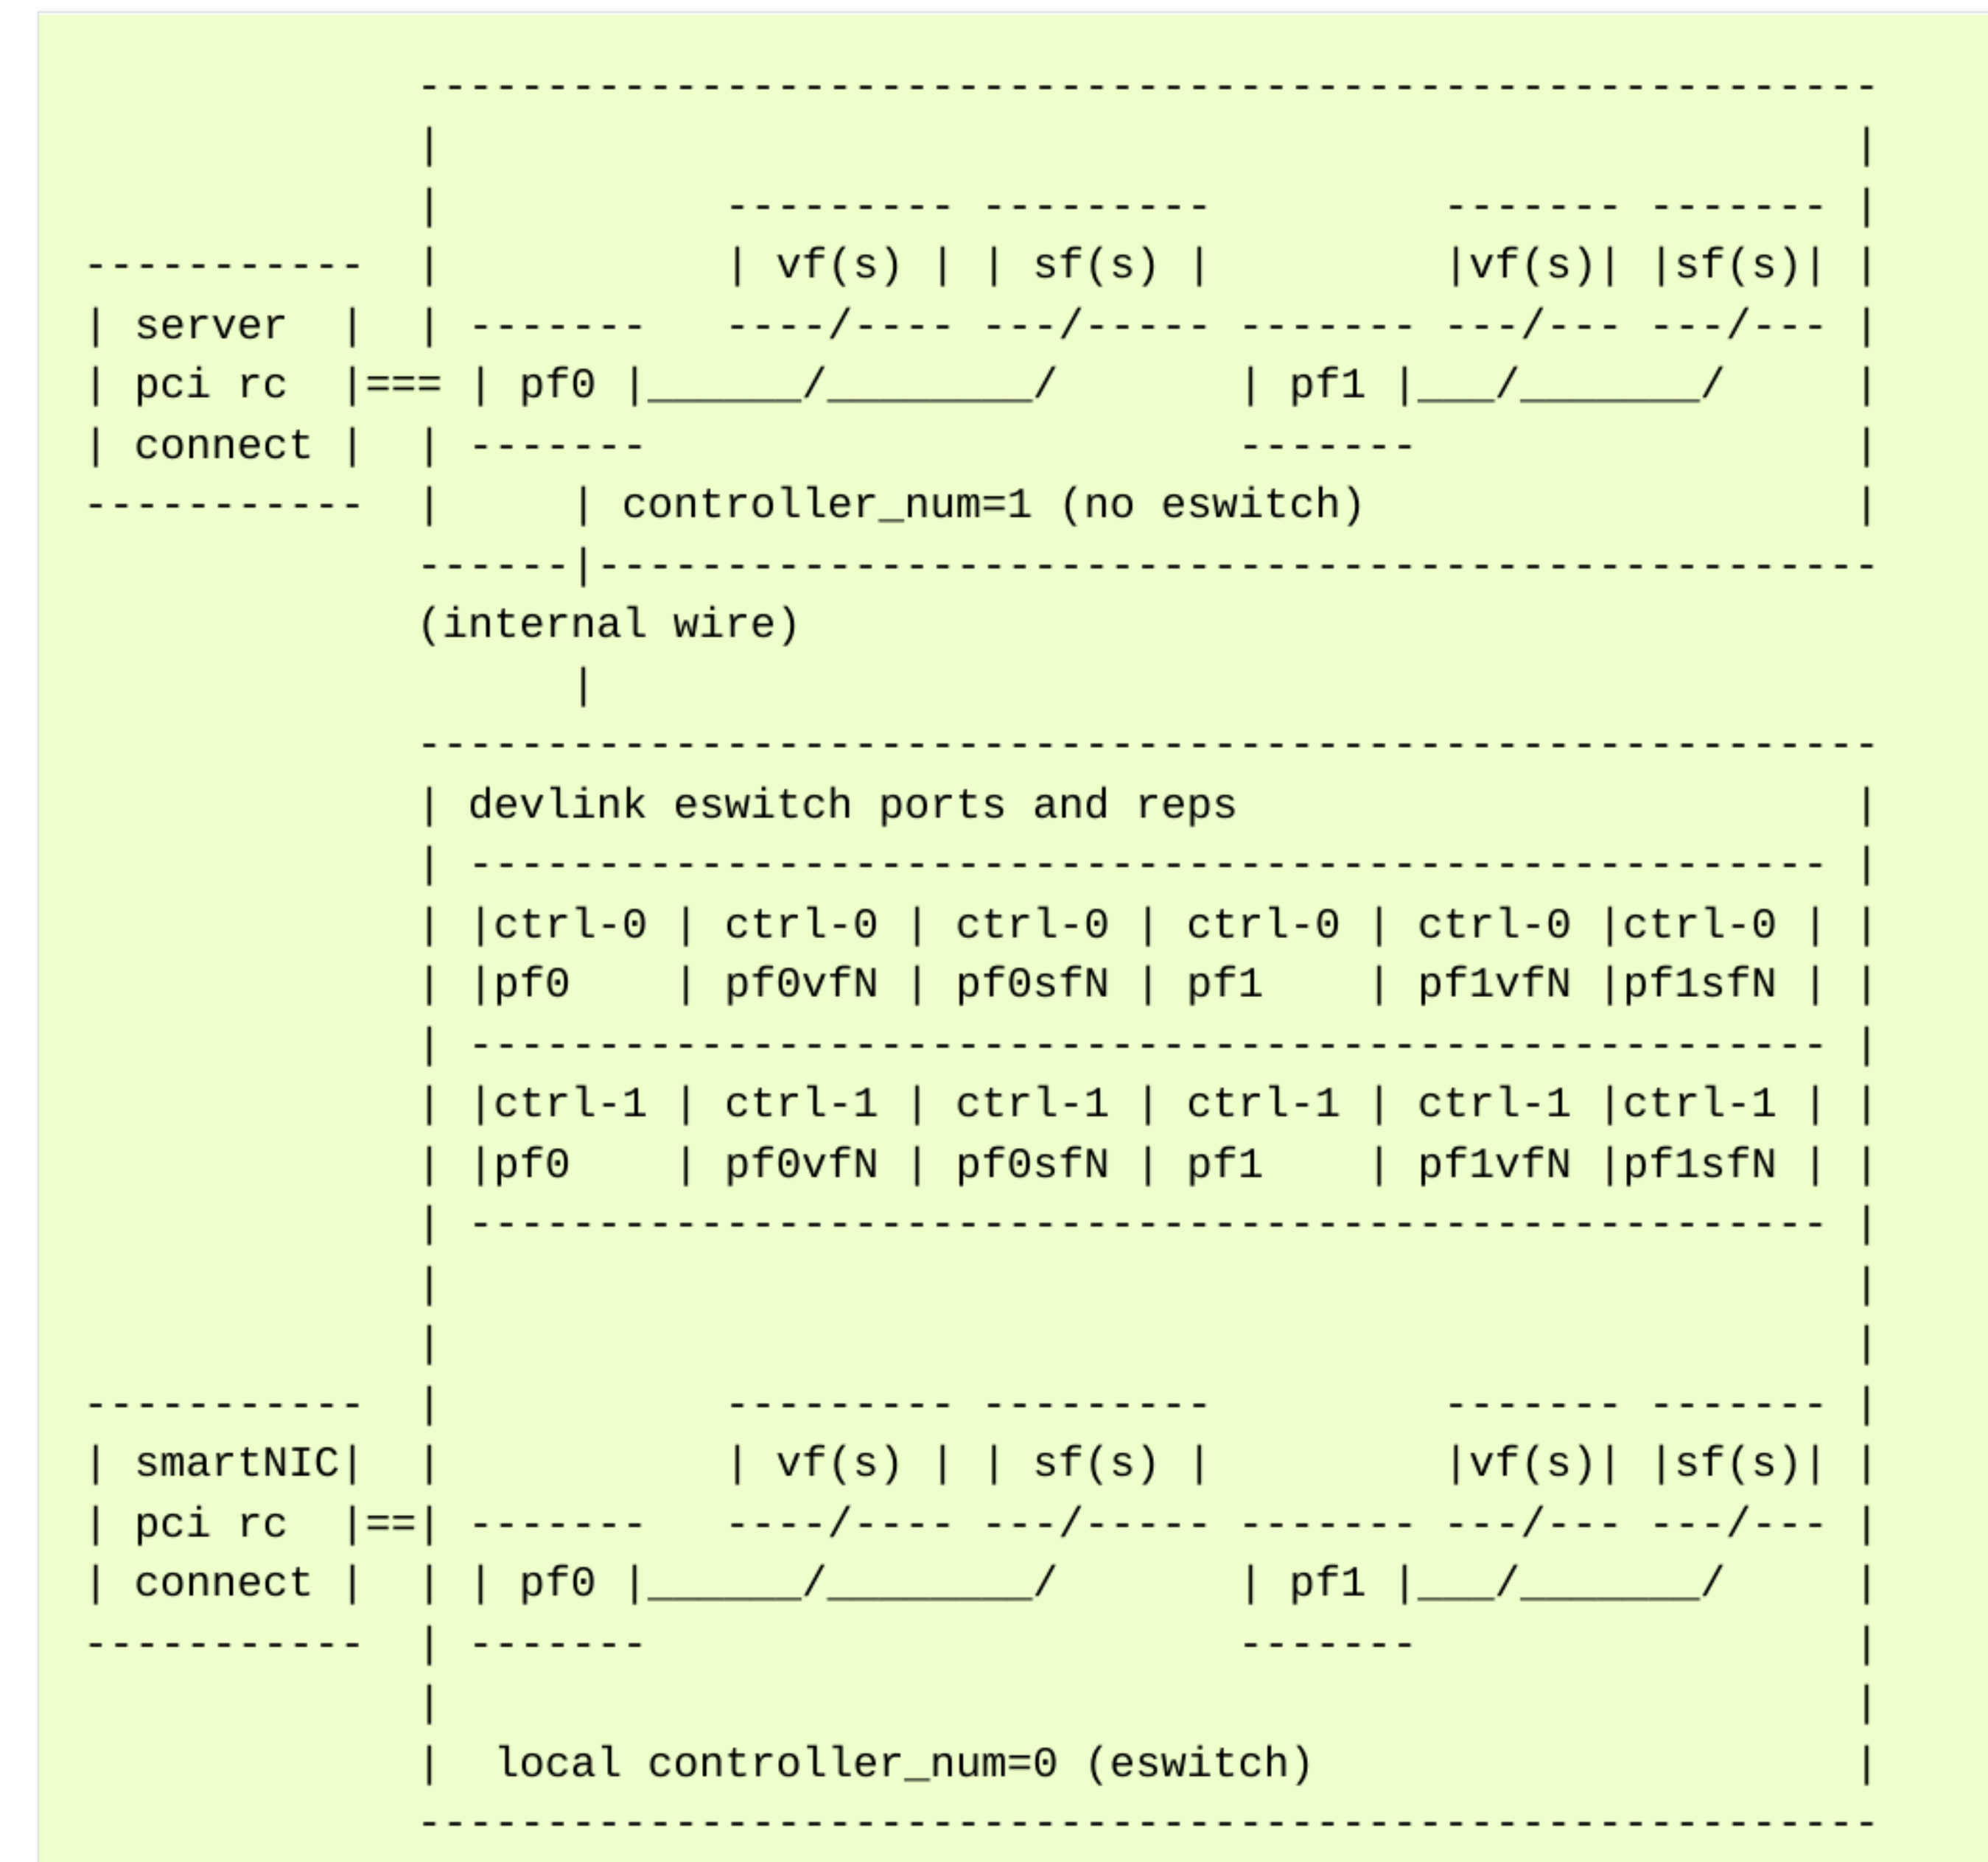

RAS feature for FW

Trigger, monitor, capture, report


- Devlink provides many mechanisms but still the picture is incomplete !
- Devlink DPIPE – very specific to the offloading pipeline !
- Devlink health – very specific to driver faulty flows, although very rich in terms of RAS
- Devlink region – dump the whole configuration space or pre-defined registers
- Devlink resource – control limits of driver-registered HW resources

- Not really utilized or implemented by many drivers
- All of the above is READ only, the NIC debug state is immutable, without any external tools !
- Missing set-ability to enable/disable hw dumps tracing and diagnostic mechanism

Vendor extensions

Dynamic approach

- High configurability issues isn't specific to NICs and already had been addressed in many products
- Ethtool module eeprom and register dump* vendor specific parsing
- Nvme-cli : <https://man.archlinux.org/man/nvme.1>
 - Nvme-fw-log(1), nvme-smart-log(1) , nvme-fw-activate(1), nvme-fw-commit(1)
 - Plugins/Vendor extension commands:
 - nvme-intel-xyz
- Kubernetes: Container Network Interface (CNI) Specification plugins
 - plugin is a program that applies a specified network configuration.
 - <https://github.com/containernetworking/cni/blob/spec-v1.0.0/SPEC.md#summary>
- OpenStack
 - "OpenStack SDK is implemented as an extensible core, upon which vendor extensions can be plugged in"
- Libvirt ?

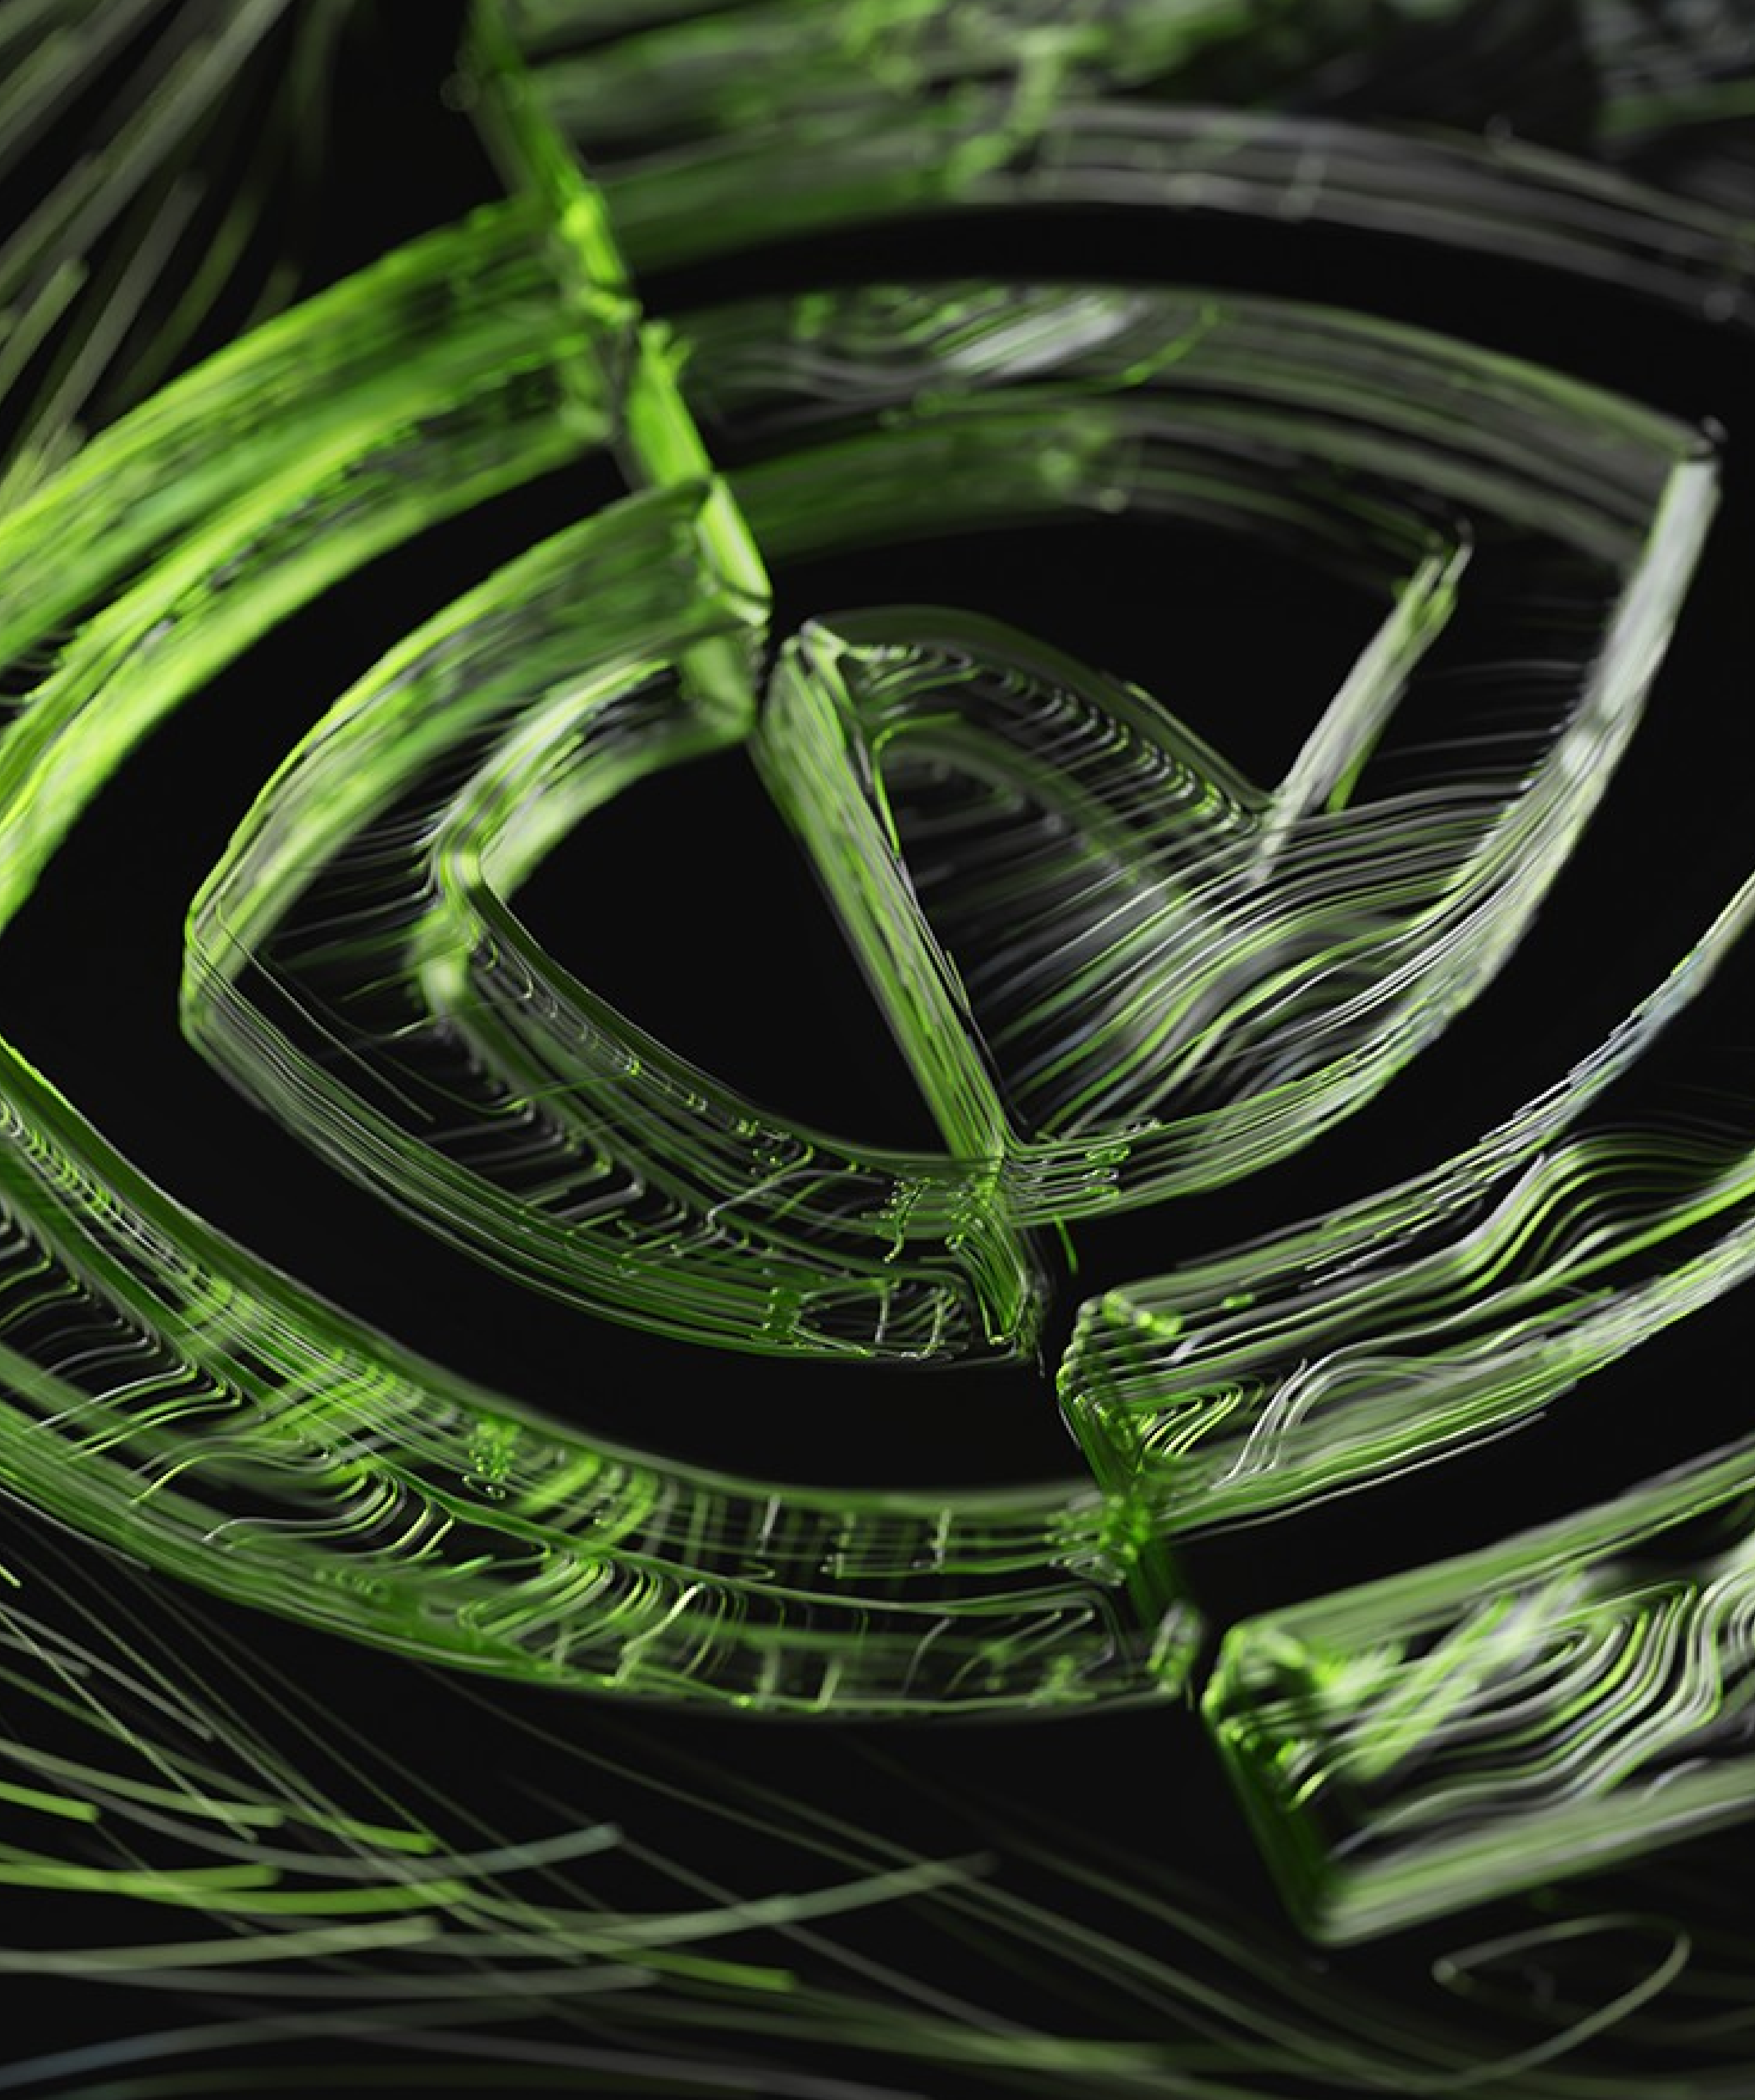

To summarize

- NIC attestation is still immature even with all the existing mainstream tools
- Embargo on devlink parameters should be lifted ! it's an unpopulated wonderland !
- Kernel Admins, developers, testers, and curious HW explorers will welcome such ability to easily customize the HW !

Questions ?

